


LED Linear Strip

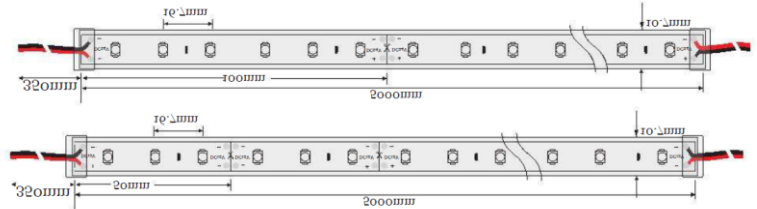


Standard

Accessories

Features

N/A



N/A

SPECIFICATIONS

Product Code		CL7-3528-X-827-Y-Z	CL7-3528-X-830-Y-Z	CL7-3528-X-840-Y-Z	CL7-3528-X-850-Y-Z	CL7-3528-X-860-Y-Z
Luminaire	Finish	-				
	Material	PVC				
	Minimum unit length	62.5mm(12V) 125mm(24V)	50mm(12V) 100mm(24V)	31.3mm(12V) 62.5mm(24V)	25mm(12V) 50mm(24V)	16.7mm(12V) 33.3mm(24V)
	Dimension : LxWxH(mm)	5000(L) x 10(W) x 1(H)mm (IP20) 5000(L) x 12(W) x 4(H)mm (IP65)				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	6000K
	Color Rendering Index (CRI)	Ra>90			Ra>80	
	Luminous flux	400lm	500lm	800lm	1000lm	1500lm
	LED nodes / Meter (X)	48 pcs/M	60 pcs/M	96 pcs/M	120 pcs/M	180 pcs/M
Beam Angle	120Deg Open Beam					
Electrical	Input (Y)	12V dc			24V dc	
	LED Power	3.8W	4.8W	7.7W	9.6W	14.4W
Driver	Non-Dimmable	on / off				
	Dimmable	1-10V				
Protection	Protection Rating (IP) (Z)	IP20			IP65 (Silicon Tube)	
Accessories		Aluminium Track			PC Cover	

Ordering example : CL7-3528-**48**-827-**12V-IP20** (48LEDs, 2700K, **12V**, **IP20**)