


LED Linear Strip

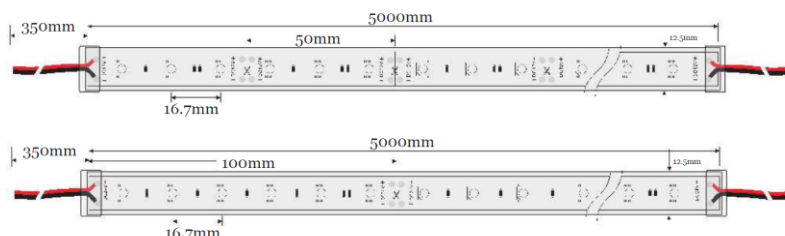


Standard

Accessories

Features

N/A



N/A

SPECIFICATIONS

Product Code		CL7-5050-X-827-Y-Z	CL7-5050-X-830-Y-Z	CL7-5050-X-840-Y-Z	CL7-5050-X-850-Y-Z	CL7-5050-X-860-Y-Z
Luminaire	Finish	-				
	Material	PVC				
	Minimum unit length	100mm(12V) 166.7mm(24V)	62.5mm(12V) 125mm(24V)	50mm(12V) 100mm(24V)	41.7mm(12V) 83.3mm(24V)	25mm(12V) 50mm(24V)
	Dimension : LxWxH(mm)	5000(L) x 10(W) x 1(H)mm (IP20) 5000(L) x 12(W) x 4(H)mm (IP65)				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	6000K
	Color Rendering Index (CRI)	Ra>90			Ra>80	
	Luminous flux	770lm	1150lm	1400lm	1700lm	2800lm
	LED nodes / Meter (X)	30 pcs/M	48 pcs/M	60 pcs/M	72 pcs/M	120 pcs/M
Beam Angle	120Deg Open Beam					
Electrical	Input (Y)	12Vdc			24Vdc	
	LED Power	7.2W	11.5W	14.4W	17.3W	28.8W
Driver	Non-Dimmable	on / off				
	Dimmable	1-10V				
Protection	Protection Rating (IP) (Z)	IP20			IP65 (Silicon Tube)	
Accessories		Aluminium Track			PC Cover	

Ordering example : CL7-5050-30-827-12V-IP20 (30LEDs, 2700K, 12V, IP20)