


## Linear Pro Series




Standard

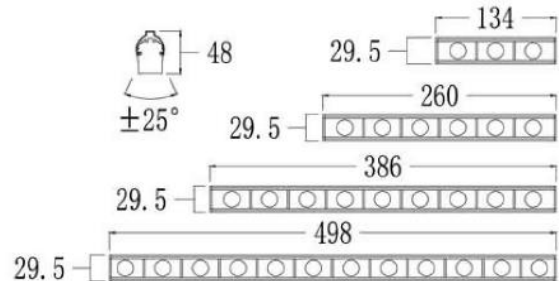

Accessories

N/A

Features




### SPECIFICATIONS

Product Code		CL-702-1-X-B-HP-Y-927	CL-702-1-X-B-HP-Y-930	CL-702-1-X-B-HP-Y-940	CL-702-1-X-B-HP-Y-960
Luminaire	Finish (X)	Black			
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	134(L) x 29.5(W) x 48(H)mm Length : 134(L), 260(L), 386(L), 498(L)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	6000K
	Color Rendering Index (CRI)	Ra≥90		Ra≥80	
	Luminous Flux	340lm - 1710lm			
Beam Angle	(Y)	6D/20D/40D/60D/10 x 50D/6 x 70D/9x70D			
Electrical	Input	Constant Current (350-500mA)			
	LED Power	134(L)mm 3W/6W 260(L)mm 6W/12W 386(L)mm 9W/18W 498(L)mm 12W/24W			
Driver	Non-Dimmable	on / off			
	Dimmable	-			
Protection	Protection Rating (IP)	IP44			
Accessories		-			

Ordering example : CL-702-1-B-B-HP-Y-927 (Black, 6D beam angle, Ra90, 2700K)

## Linear Pro Series

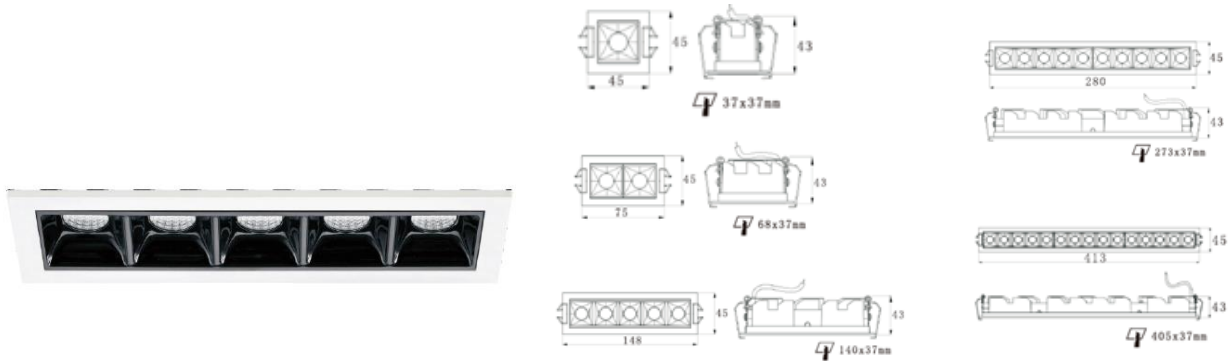

Standard



Accessories

N/A

Features






### SPECIFICATIONS

Product Code		CL-147-X-COB-Y-927	CL-147-X-COB-Y-930	CL-147-X-COB-Y-935	CL-147-X-COB-Y-940
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	45(L) x 45(W) x 43(H)mm Length: 45(L), 75(L), 148(L), 280(L), 405(L)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	3500K	4000K
	Color Rendering Index (CRI)	Ra≥90		Ra≥80	
	Luminous Flux	100lm / W			
Beam Angle	(Y)	15D	30D	45D	
Electrical	Input	Constant Current (350-700mA)			
	LED Power	3W	6W	12W	22W
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		-			

Ordering example : CL-147-W-COB-15D-927 (White, 15D beam angle, Ra90, 2700K)

## Linear Pro Series

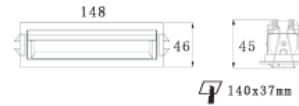

Standard

Accessories

Features



N/A




WHITE  
BLACK

### SPECIFICATIONS

Product Code		CL-147WW-X-COB-Y-927	CL-147WW-X-COB-Y-930	CL-147WW-X-COB-Y-940
Luminaire	Finish (X)	White		Black
	Material	Aluminium		
	Reflector	-		
	Dimension : LxWxH(mm)	148 x 46 x 45 (H)mm	280 x 46 x 45 (H)mm	413 x 46 x 45 (H)mm
Light Source	Color Temperature (CCT)	2700K	3000K	4000K
	Color Rendering Index (CRI)	Ra≥90		Ra≥80
	Luminous Flux	100lm / W		
Beam Angle	(Y)	WallWasher		
Electrical	Input	Constant Current (350-700mA)		
	LED Power	12W	22W	35W
Driver	Non-Dimmable	on / off		
	Dimmable	TRIAC	1-10V	DALI
Protection	Protection Rating (IP)	IP20		
Accessories		-		

Ordering example : CL-147WW-**W**-COB-**W**-927 (White, WallWasher, Ra90, 2700K)

## Linear Pro Series

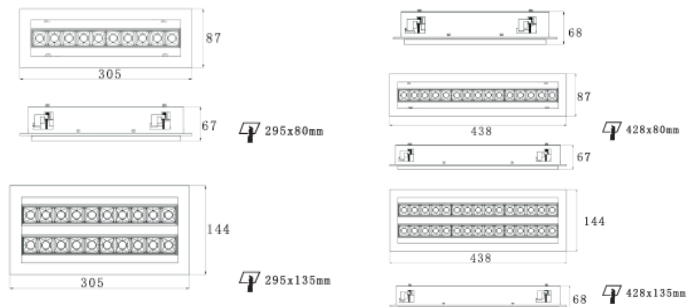

### Standard



### Accessories

N/A

### Features






○ WHITE  
● BLACK

### SPECIFICATIONS

Product Code		CL-147WW-RA-X-COB-Y-927	CL-147WW-RA-X-COB-Y-930	CL-147WW-RA-X-COB-Y-935	CL-147WW-RA-X-COB-Y-940
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	305 x 87x 67(H)mm	305 x 144 x 68(H)mm	438 x 87 x 67(H)mm	438 x 144 x 68(H)mm
Light Source	Color Temperature (CCT)	2700K	3000K	3500K	4000K
	Color Rendering Index (CRI)	Ra≥90		Ra≥80	
	Luminous Flux	100lm / W			
Beam Angle	(Y)	15D	30D	45D	
Electrical	Input	Constant Current (350-700mA)			
	LED Power	22 W	2 x 22W	35 W	2 x 35W
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		-			

Ordering example : CL-147WW-RA-W-COB-15D-927 (White, 15D beam angle, Ra90, 2700K)

## Linear Pro Series

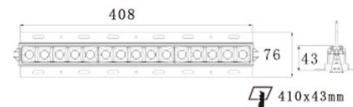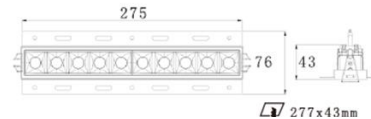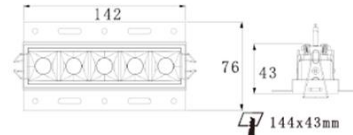

Standard



Accessories

N/A

Features



○ WHITE  
● BLACK

### SPECIFICATIONS

Product Code		CL-147-TL-X-COB- Y-927	CL-147-TL-X-COB- Y-930	CL-147-TL-X-COB- Y-935	CL-147-TL-X-COB- Y-940
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	142 x 76 x 43(H)mm	275 x 76 x 43(H)mm	408 x 76 x 43(H)mm	
Light Source	Color Temperature (CCT)	2700K	3000K	3500K	4000K
	Color Rendering Index (CRI)	Ra≥90		Ra≥80	
	Luminous Flux	100lm / W			
Beam Angle	(Y)	15D	30D	45D	
Electrical	Input	Constant Current (350-700mA)			
	LED Power	12W	22W	35W	
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		-			

Ordering example : CL-147-TL-W-COB-15D-927 (White, 15D beam angle, Ra90, 2700K)