



## LED Linear Strip

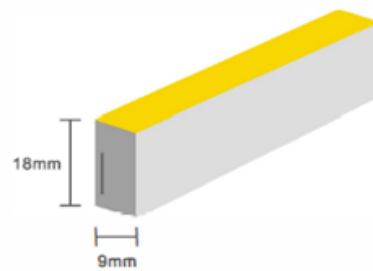

Standard

Accessories

Features

N/A



### SPECIFICATIONS

Product Code	<b>S-FR-F10B-Z</b>		
Luminaire	Finish	-	
	Material	PVC/Silicon	
	Minimum unit length	24V / 83.3mm / 6 LEDs	
	Dimension : LxWxH(mm)	Max.20000(L) x 18(W) x 9(H)mm	
Light Source	Color Temperature (CCT)	Warm White / White / Red / Green / Blue / Amber / Pink / Purple / RGB	
	Color Rendering Index (CRI)	Ra>90	Ra>80
	Luminous flux	120 lm/w	
	LED nodes / Meter	<b>72</b> pcs/M	
Beam Angle	160Deg Open Beam		
Electrical	Input	<b>24V</b> dc	
	LED Power	8.6W	10W
Driver	Non-Dimmable	on / off	
	Dimmable	1-10V	DMX Control
Protection	Protection Rating (IP) (Z)	<b>IP65</b>	<b>IP67</b>
Accessories	Aluminum Track		

Ordering example : S-FR-F10B-**IP65**

## LED Linear Strip




Standard

Accessories

Features

N/A




N/A

### SPECIFICATIONS

Product Code		CL7-2835-X-827-Y-Z	CL7-2835-X-830-Y-Z	CL7-2835-X-840-Y-Z	CL7-2835-X-850-Y-Z	CL7-2835-X-860-Y-Z
Luminaire	Finish	-				
	Material	PVC				
	Minimum unit length	100mm(12V) 166.7mm(24V)	50mm(12V) 100mm(24V)	31.5mm(12V) 62.5mm(24V)	25mm(12V) 50mm(24V)	16.65mm(12V) 33.3mm(24V)
	Dimension : LxWxH(mm)	5000(L) x 10(W) x 1(H)mm (IP20) 5000(L) x 12(W) x 4(H)mm (IP65)				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	6000K
	Color Rendering Index (CRI)	Ra>90			Ra>80	
	Luminous flux	580lm	1150lm	1900lm	2300lm	3500lm
	LED nodes / Meter (X)	30 pcs/M	60 pcs/M	96 pcs/M	120 pcs/M	180 pcs/M
Beam Angle	120Deg Open Beam					
Electrical	Input (Y)	12Vdc			24Vdc	
	LED Power	7.2W	14.4W	23W	28.8W	43.2W
Driver	Non-Dimmable	on / off				
	Dimmable	1-10V				
Protection	Protection Rating (IP) (Z)	IP20			IP65 (Silicon Tube)	
Accessories		Aluminium Track			PC Cover	

Ordering example : CL7-2835-30-827-12V-IP20 (30LEDs, 2700K, 12V, IP20)

## LED Linear Strip

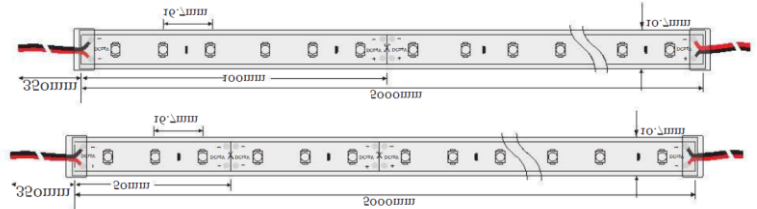


Standard

Accessories

Features

N/A



N/A

### SPECIFICATIONS

Product Code		<b>CL7-3528-X-827-Y-Z</b>	<b>CL7-3528-X-830-Y-Z</b>	<b>CL7-3528-X-840-Y-Z</b>	<b>CL7-3528-X-850-Y-Z</b>	<b>CL7-3528-X-860-Y-Z</b>
Luminaire	Finish	-				
	Material	PVC				
	Minimum unit length	62.5mm(12V) 125mm(24V)	50mm(12V) 100mm(24V)	31.3mm(12V) 62.5mm(24V)	25mm(12V) 50mm(24V)	16.7mm(12V) 33.3mm(24V)
	Dimension : LxWxH(mm)	5000(L) x 10(W) x 1(H)mm (IP20) 5000(L) x 12(W) x 4(H)mm (IP65)				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	6000K
	Color Rendering Index (CRI)	Ra>90			Ra>80	
	Luminous flux	400lm	500lm	800lm	1000lm	1500lm
	LED nodes / Meter (X)	<b>48</b> pcs/M	<b>60</b> pcs/M	<b>96</b> pcs/M	<b>120</b> pcs/M	<b>180</b> pcs/M
Beam Angle	120Deg Open Beam					
Electrical	Input (Y)	<b>12V</b> dc			<b>24V</b> dc	
	LED Power	3.8W	4.8W	7.7W	9.6W	14.4W
Driver	Non-Dimmable	on / off				
	Dimmable	1-10V				
Protection	Protection Rating (IP) (Z)	<b>IP20</b>			<b>IP65</b> (Silicon Tube)	
Accessories		Aluminium Track			PC Cover	

Ordering example : CL7-3528-**48**-827-**12V-IP20** (48LEDs, 2700K, **12V**, **IP20**)

## LED Linear Strip



DC 12V

+Golden Une

- Argentine Line

16.66




Standard

Accessories

Features

N/A





N/A

### SPECIFICATIONS

Product Code		CL-5630-X-827-Y-Z	CL-5630-X-830-Y-Z	CL-5630-X-840-Y-Z	CL-5630-X-850-Y-Z	CL-5630-X-860-Y-Z
Luminaire	Finish	-				
	Material	PVC				
	Minimum unit length	12V / 50mm / 3 LEDs			24V / 100mm / 6 LEDs	
	Dimension : LxWxH(mm)	5000(L) x 10(W) x 1(H)mm (IP20) 5000(L) x 12(W) x 4(H)mm (IP65)				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	6000K
	Color Rendering Index (CRI)	Ra>80				
	Luminous flux	1500lm				
	LED nodes / Meter (X)	60 LEDs				
Beam Angle	120Deg Open Beam					
Electrical	Input (Y)	12Vdc			24Vdc	
	LED Power	16W				
Driver	Non-Dimmable	on / off				
	Dimmable	1-10V				
Protection	Protection Rating (IP) (Z)	IP20			IP65 (Silicon Tube)	
Accessories		Aluminium Track			PC Cover	

Ordering example : CL-5630-60-827-12V-IP20 (60LEDs,2700K,12V, IP20)

## LED Linear Strip



Standard

Accessories

Features

N/A




### SPECIFICATIONS

Product Code		<b>S-FR-F15A-Z</b>		
Luminaire	Finish	-		
	Material	PVC/Silicon		
	Minimum unit length	24V / 100mm / 6 LEDs		
	Dimension : LxWxH(mm)	Max.15000(L) x 11.5(W) x 21(H)mm		
Light Source	Color Temperature (CCT)	RGB	RGBW	
	Color Rendering Index (CRI)	Ra>90	Ra>80	
	Luminous flux	120 lm/w		
	LED nodes / Meter	<b>60</b> pcs/M		
Beam Angle		160Deg Open Beam		
Electrical	Input	<b>24V</b> dc		
	LED Power	12W		
Driver	Non-Dimmable	on / off		
	Dimmable	DMX control		
Protection	Protection Rating (IP) (Z)	<b>IP65</b>	<b>IP67</b>	<b>IP68</b>
Accessories		Aluminum Track		

Ordering example : S-FR-F15A-**IP65**

## LED Linear Strip

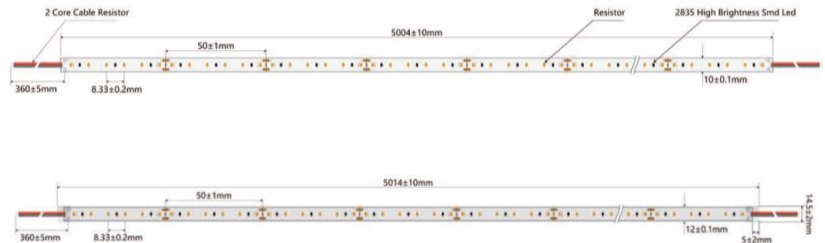


Standard

Accessories

Features

N/A




N/A

### SPECIFICATIONS

Product Code		CL7-2216-X-827-Y-Z	CL7-2216-X-830-Y-Z	CL7-2216-X-840--Y-Z	CL7-2216-X-850-Y-Z	CL7-2216-X-860-Y-Z
Luminaire	Finish	-				
	Material	PVC				
	Minimum unit length	25mm	33.3mm(12V) 66.6mm(24V)	12.5mm(12V) 25mm(24V)	10mm(12V) 20mm(24V)	14.3mm
	Dimension : LxWxH(mm)	5000(L) x 10(W) x 1(H)mm (IP20) 5000(L) x 12(W) x 4(H)mm (IP65)				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	6000K
	Color Rendering Index (CRI)	Ra>90			Ra>80	
	Luminous flux	640lm	1090lm	1350lm	1620lm	1625lm
	LED nodes / Meter (X)	120 pcs/M	180 pcs/M	240 pcs/M	300 pcs/M	420 pcs/M
Beam Angle	120Deg Open Beam					
Electrical	Input (Y)	12Vdc			24Vdc	
	LED Power	7.2W	12W	15W	18W	18W
Driver	Non-Dimmable	on / off				
	Dimmable	1-10V				
Protection	Protection Rating (IP) (Z)	IP20			IP65 (Silicon Tube)	
Accessories		Aluminium Track			PC Cover	

Ordering example : CL7-2216-120-827-12V-IP20 (120LEDs, 2700K, 12V, IP20)

## LED Linear Strip

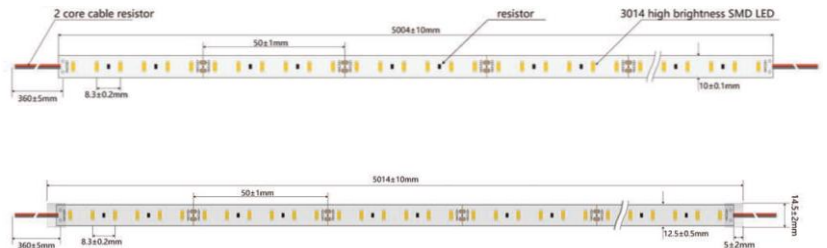


Standard

Accessories

Features

N/A




N/A

### SPECIFICATIONS

Product Code		<b>CL7-3014-X-827-Y-Z</b>	<b>CL7-3014-X-830--Y-Z</b>	<b>CL7-3014-X-840--Y-Z</b>	<b>CL7-3014-X-850--Y-Z</b>	<b>CL7-3014-X-860--Y-Z</b>
Luminaire	Finish	-				
	Material	PVC				
	Minimum unit length	50mm(12V) 100mm(24V)	31.3mm(12V) 62.5mm(24V)	25mm(12V) 50mm(24V)	16.65mm(12V) )	12.5mm(12V) 25mm(24V)
	Dimension : LxWxH(mm)	5000(L) x 10(W) x 1(H)mm (IP20) 5000(L) x 12(W) x 4(H)mm (IP65)				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	6000K
	Color Rendering Index (CRI)	Ra>90			Ra>80	
	Luminous flux	720lm	1150lm	1450lm	2150lm	3000lm
	LED nodes / Meter (X)	<b>60</b> pcs/M	<b>96</b> pcs/M	<b>120</b> pcs/M	<b>180</b> pcs/M	<b>240</b> pcs/M
Beam Angle	120Deg Open Beam					
Electrical	Input (Y)	<b>12V</b> dc			<b>24V</b> dc	
	LED Power	7.2W	11.5W	14.4W	21.5W	28.8W
Driver	Non-Dimmable	on / off				
	Dimmable	1-10V				
Protection	Protection Rating (IP) (Z)	<b>IP20</b>			<b>IP65</b> (Silicon Tube)	
Accessories		Aluminium Track			PC Cover	

Ordering example : CL7-3014-**60-827-12V-IP20** (60LEDs, 2700K, **12V**, **IP20**)

## LED Linear Strip

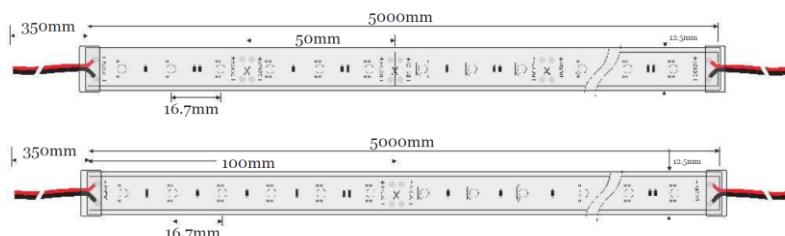


Standard

Accessories

Features

N/A



N/A

### SPECIFICATIONS

Product Code		CL7-5050-X-827-Y-Z	CL7-5050-X-830-Y-Z	CL7-5050-X-840-Y-Z	CL7-5050-X-850-Y-Z	CL7-5050-X-860-Y-Z
Luminaire	Finish	-				
	Material	PVC				
	Minimum unit length	100mm(12V) 166.7mm(24V)	62.5mm(12V) 125mm(24V)	50mm(12V) 100mm(24V)	41.7mm(12V) 83.3mm(24V)	25mm(12V) 50mm(24V)
	Dimension : LxWxH(mm)	5000(L) x 10(W) x 1(H)mm (IP20) 5000(L) x 12(W) x 4(H)mm (IP65)				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	6000K
	Color Rendering Index (CRI)	Ra>90			Ra>80	
	Luminous flux	770lm	1150lm	1400lm	1700lm	2800lm
	LED nodes / Meter (X)	30 pcs/M	48 pcs/M	60 pcs/M	72 pcs/M	120 pcs/M
Beam Angle	120Deg Open Beam					
Electrical	Input (Y)	12Vdc			24Vdc	
	LED Power	7.2W	11.5W	14.4W	17.3W	28.8W
Driver	Non-Dimmable	on / off				
	Dimmable	1-10V				
Protection	Protection Rating (IP) (Z)	IP20			IP65 (Silicon Tube)	
Accessories		Aluminium Track			PC Cover	

Ordering example : CL7-5050-30-827-12V-IP20 (30LEDs, 2700K, 12V, IP20)