



## AVIS LED Tracklight

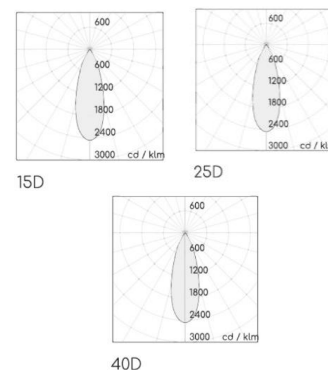

Standard

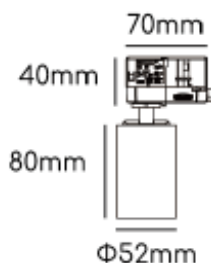

Accessories



Features






Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS


Product Code		AVIS-5WT-X-Y-927	AVIS-5WT-X-Y-935	AVIS-5WT-X-Y-940	AVIS-5WT-X-Y-950
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	PC			
	Dimension : LxWxH(mm)	Dia. 52 x 80(H)mm			
Light Source	Color Temperature (CCT)	2700K	3500K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			
	Luminous Flux	480-510lm	625-660lm	955-1015lm	
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	-			
	LED Power	5W	7W	10W	
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC			
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVIS-5WT-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVIS LED Tracklight

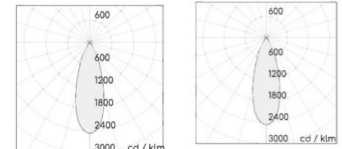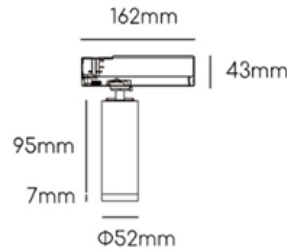

40D



Standard



CL.FARENS

Accessories



HONEYCOMB

FROSTLENS

Features

WHITE

BLACK





Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVIS-11WD-X- Y-927	AVIS-11WD-X- Y-930	AVIS-11WD-X- Y-940	AVIS-11WD-X- Y-850
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	Dia. 52 x 102(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	1393-1756lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (350mA)			
	LED Power	11.8W			
Driver	Non-Dimmable	on / off			
	Dimmable	DALI			
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVIS-11WD-W-15D-927 (White, 15D beam angle, Ra90, 2700K)


## AVON LED Tracklight

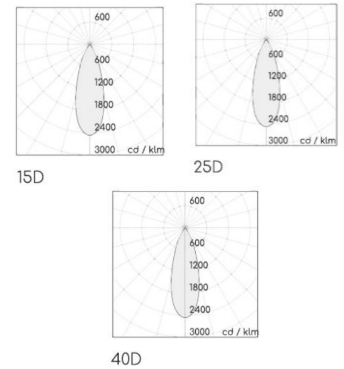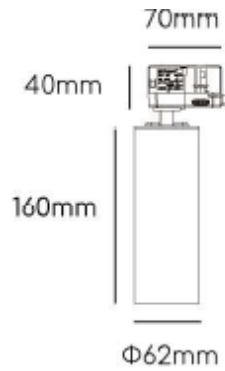

Standard



Accessories



Features





Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVON-17WA-X- Y-927	AVON-17WA-X- Y-930	AVON-17WA-X- Y-940	AVON-17WA-X- Y-850
Luminaire	Finish (X)	White			Black
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	Dia. 62 x 160(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	1921-2421lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (500mA)			
	LED Power	17.5W			
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVON-17WA-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVIS LED Tracklight

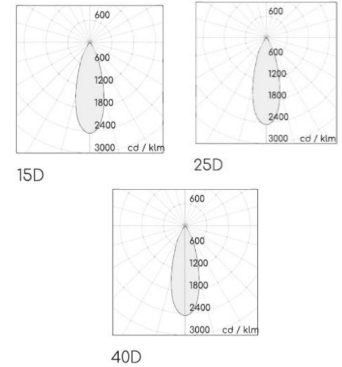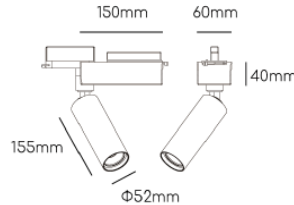

### Standard



### Accessories



### Features







Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVIS-21WD-X- Y-927	AVIS-21WD-X- Y-930	AVIS-21WD-X- Y-940	AVIS-21WD-X- Y-850	
Luminaire	Finish (X)	White			Black	
	Material	Aluminium				
	Reflector	PC				
	Dimension : LxWxH(mm)	Dia. 52 x 155(H)mm				
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K	
	Color Rendering Index (CRI)	Ra>90				Ra>80
	Luminous Flux	2254-2840lm				
Beam Angle	(Y)	15D	25D	40D		
Electrical	Input	Constant Current (600mA)				
	LED Power	21.4W				
Driver	Non-Dimmable	on / off				
	Dimmable	TRIAC	1-10V	DALI		
Protection	Protection Rating (IP)	IP20				
Accessories		Honeycomb			Frostlen	

Ordering example : AVIS-21WD-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVIS LED Tracklight

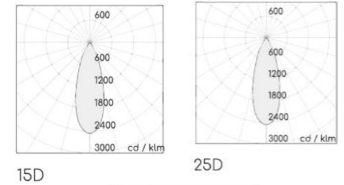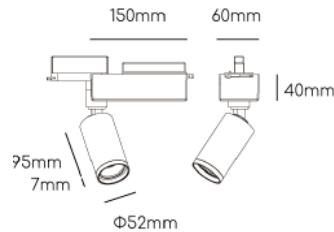

Standard



Accessories



Features





Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVIS-11WF-X-Y- 927	AVIS-11WF-X-Y- 930	AVIS-11WF-X-Y- 940	AVIS-11WF-X-Y- 850
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	Dia. 52 x 102(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	1393-1756lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (350mA)			
	LED Power	11.8W			
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVIS-11WF-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVIS LED Tracklight

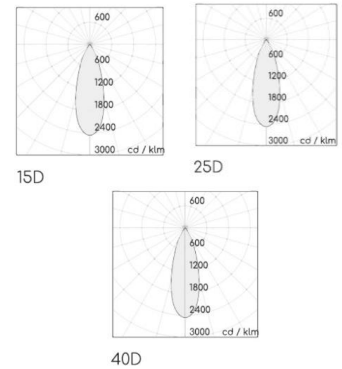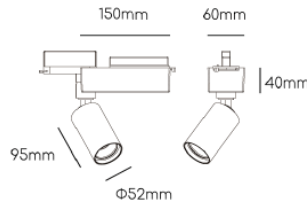

### Standard



### Accessories



### Features




Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVIS-11WA-X- Y-927	AVIS-11WA-X- Y-930	AVIS-11WA-X- Y-940	AVIS-11WA-X- Y-850
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	PC			
	Dimension : LxWxH(mm)	Dia. 52 x 95(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	1393-1756lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (350mA)			
	LED Power	11.8W			
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVIS-11WA-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVIS LED Tracklight


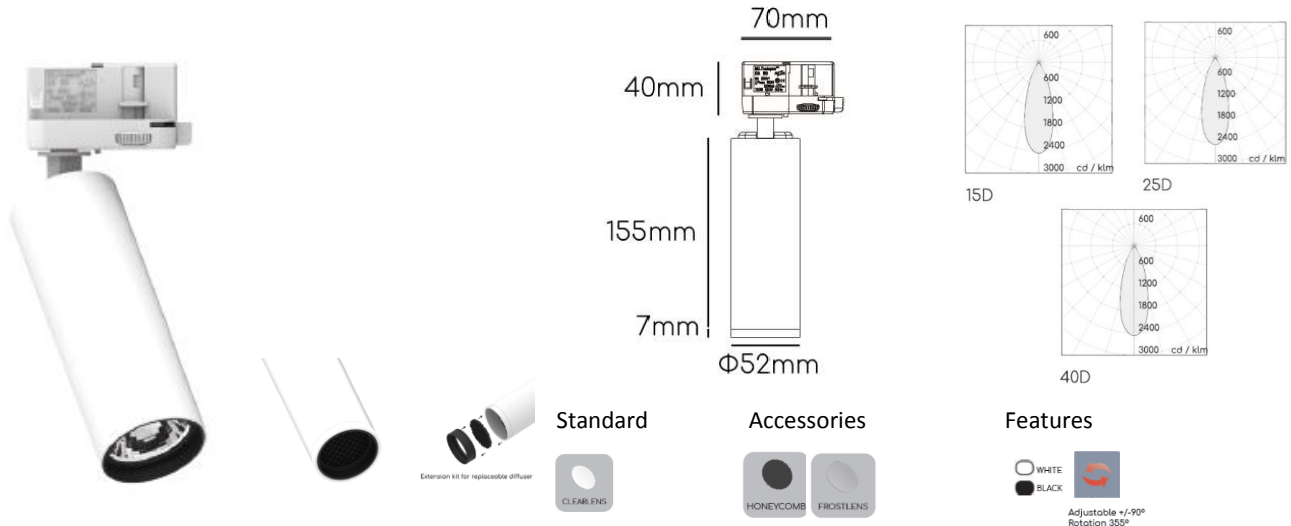


### SPECIFICATIONS

Product Code		AVIS-11WP-X-Y-927	AVIS-11WP-X-Y-930	AVIS-11WP-X-Y-940	AVIS-11WP-X-Y-850
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	PC			
	Dimension : LxWxH(mm)	Dia. 52 x 155(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	1407-1860lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (360mA)			
	LED Power	12.2W			
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVIS-11WP-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVIS LED Tracklight

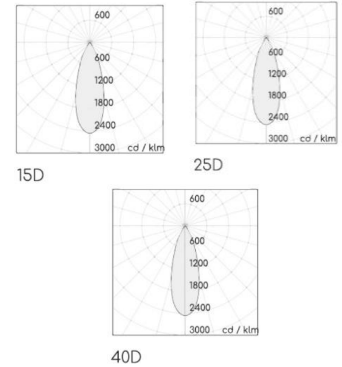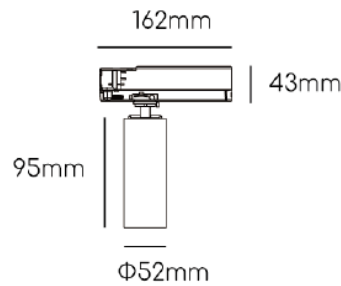

### Standard



### Accessories



### Features



Adjustable +/-90°  
Rotation 355°



## SPECIFICATIONS

Product Code		AVIS-11WH-X- Y-927	AVIS-11WH-X- Y-930	AVIS-11WH-X- Y-940	AVIS-11WH-X- Y-850
Luminaire	Finish (X)	White			Black
	Material	Aluminium			
	Reflector	PC			
	Dimension : LxWxH(mm)	Dia. 52 x 95(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	1393-1756lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (350mA)			
	LED Power	11.8W			
Driver	Non-Dimmable	on / off			
	Dimmable	DALI			
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVIS-11WH-W-15D-927 (White, 15D beam angle, Ra90, 2700K)



## AVON LED Tracklight

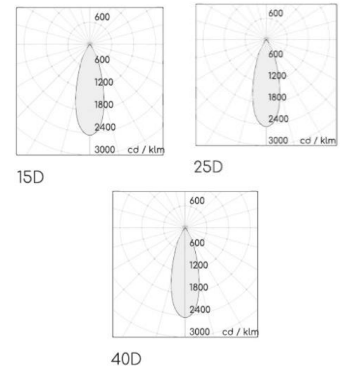

Standard



Accessories



Features





Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVON-13WA-X- Y-927	AVON-13WA-X- Y-930	AVON-13WA-X- Y-940	AVON-13WA-X- Y-950
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	PC			
	Dimension : LxWxH(mm)	Dia. 62 x 85(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			
	Luminous Flux	1245-1330lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	-			
	LED Power	13.8W			
Driver	Non-Dimmable	on / off			
	Dimmable	-			
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVON-13WA-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVON LED Tracklight

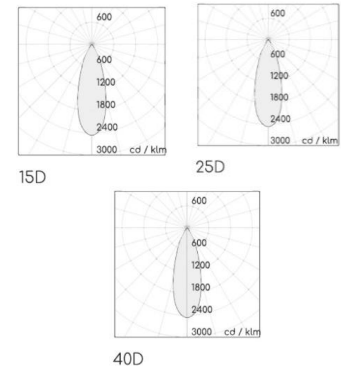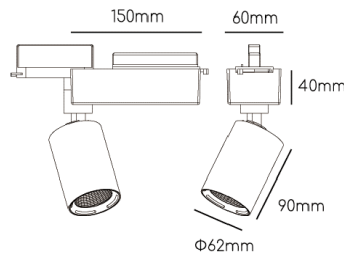

### Standard



### Accessories



### Features






Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS


Product Code		AVON-15WD-X- Y-927	AVON-15WD-X- Y-930	AVON-15WD-X- Y-940	AVON-15WD-X- Y-850
Luminaire	Finish (X)	White			Black
	Material	Aluminium			
	Reflector	PC			
	Dimension : LxWxH(mm)	Dia. 62 x 90(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	1749-2204lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (450mA)			
	LED Power	15.6W			
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVON-15WD-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVIS LED Tracklight

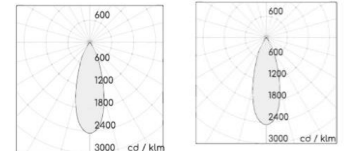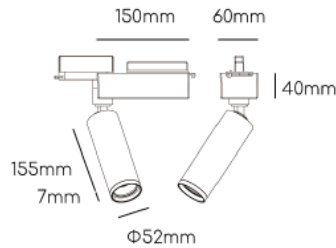

40D



Standard



Accessories



Features





Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVIS-21WA-X- Y-927	AVIS-21WA-X- Y-990	AVIS-21WA-X- Y-940	AVIS-21WA-X- Y-850
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	Dia. 52 x 155(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	2254-2840lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (600mA)			
	LED Power	21.4W			
Driver	Non-Dimmable	on / off			
	Dimmable	TRIAC	1-10V	DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVIS-21WA-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVIS LED Tracklight

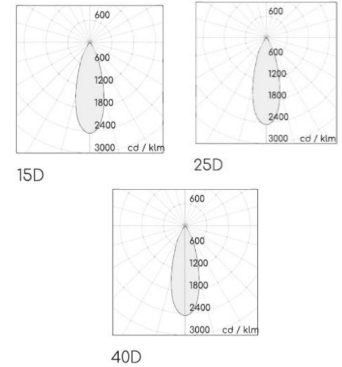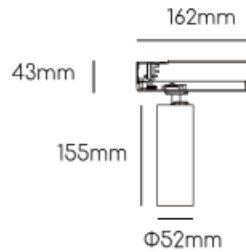

### Standard



### Accessories



### Features





Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVIS-21WH-X- Y-927	AVIS-21WH-X- Y-930	AVIS-21WH-X- Y-940	AVIS-21WH-X- Y-850
Luminaire	Finish (X)	White		Black	
	Material	Aluminium			
	Reflector	-			
	Dimension : LxWxH(mm)	Dia. 52 x 155(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	2254-2840lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (600mA)			
	LED Power	21.4W			
Driver	Non-Dimmable	on / off			
	Dimmable	DALI			
Protection	Protection Rating (IP)	IP20			
Accessories					

Ordering example : AVIS-21WH-W-15D-927 (White, 15D beam angle, Ra90, 2700K)

## AVON LED Tracklight

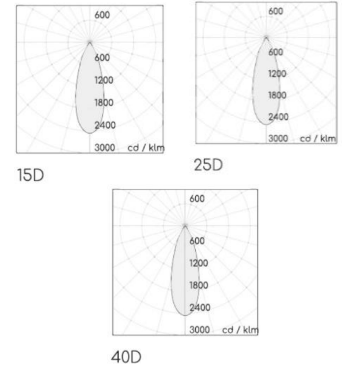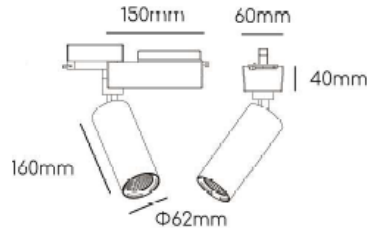

### Standard



### Accessories



### Features



Adjustable +/-90°  
Rotation 355°

### SPECIFICATIONS

Product Code		AVON-29WD-X- Y-927	AVON-29WD-X- Y-930	AVON-29WD-X- Y-940	AVON-29WD-X- Y-850
Luminaire	Finish (X)	White			Black
	Material	Aluminium			
	Reflector	PC			
	Dimension : LxWxH(mm)	Dia. 62 x 160(H)mm			
Light Source	Color Temperature (CCT)	2700K	3000K	4000K	5000K
	Color Rendering Index (CRI)	Ra>90			Ra>80
	Luminous Flux	3148-3965lm			
Beam Angle	(Y)	15D	25D	40D	
Electrical	Input	Constant Current (800mA)			
	LED Power	28.2W			
Driver	Non-Dimmable	on / off			
	Dimmable	1-10V		DALI	
Protection	Protection Rating (IP)	IP20			
Accessories		Honeycomb		Frostlen	

Ordering example : AVON-29WD-W-15D-927 (White, 15D beam angle, Ra90, 2700K)